

Translucent



Vizela

1% Openness

Translucent • Interior

FR Class:

NFPA 701-10 TM #1, CA U.S. Title 19, ASTM E-84

Environmental Benefits:

GREENGUARD Gold

RoHS-Lead Free


PVC Free

ASTM G21 Fungal Resistance


10 Year Interior Warranty

Standard Width:


94" (240 cm)



Blanc



Sahel



Mississippi



Chartreux



Loutre



Vela

3% Openness

Translucent • Interior

FR Class:

NFPA 701-10 TM #1, CA U.S. Title 19, M1NFPA92-512

Environmental Benefits:

GREENGUARD Gold

Oeko-Tex 100 Certified

RoHS-Lead Free

PVC Free

ASTM G21 Fungal Resistance

10 Year Interior Warranty

Standard Width:

118" (300 cm)




Charcoal



Charcoal Bronze



Linen




Pearl Linen




Pearl



Pewter



White

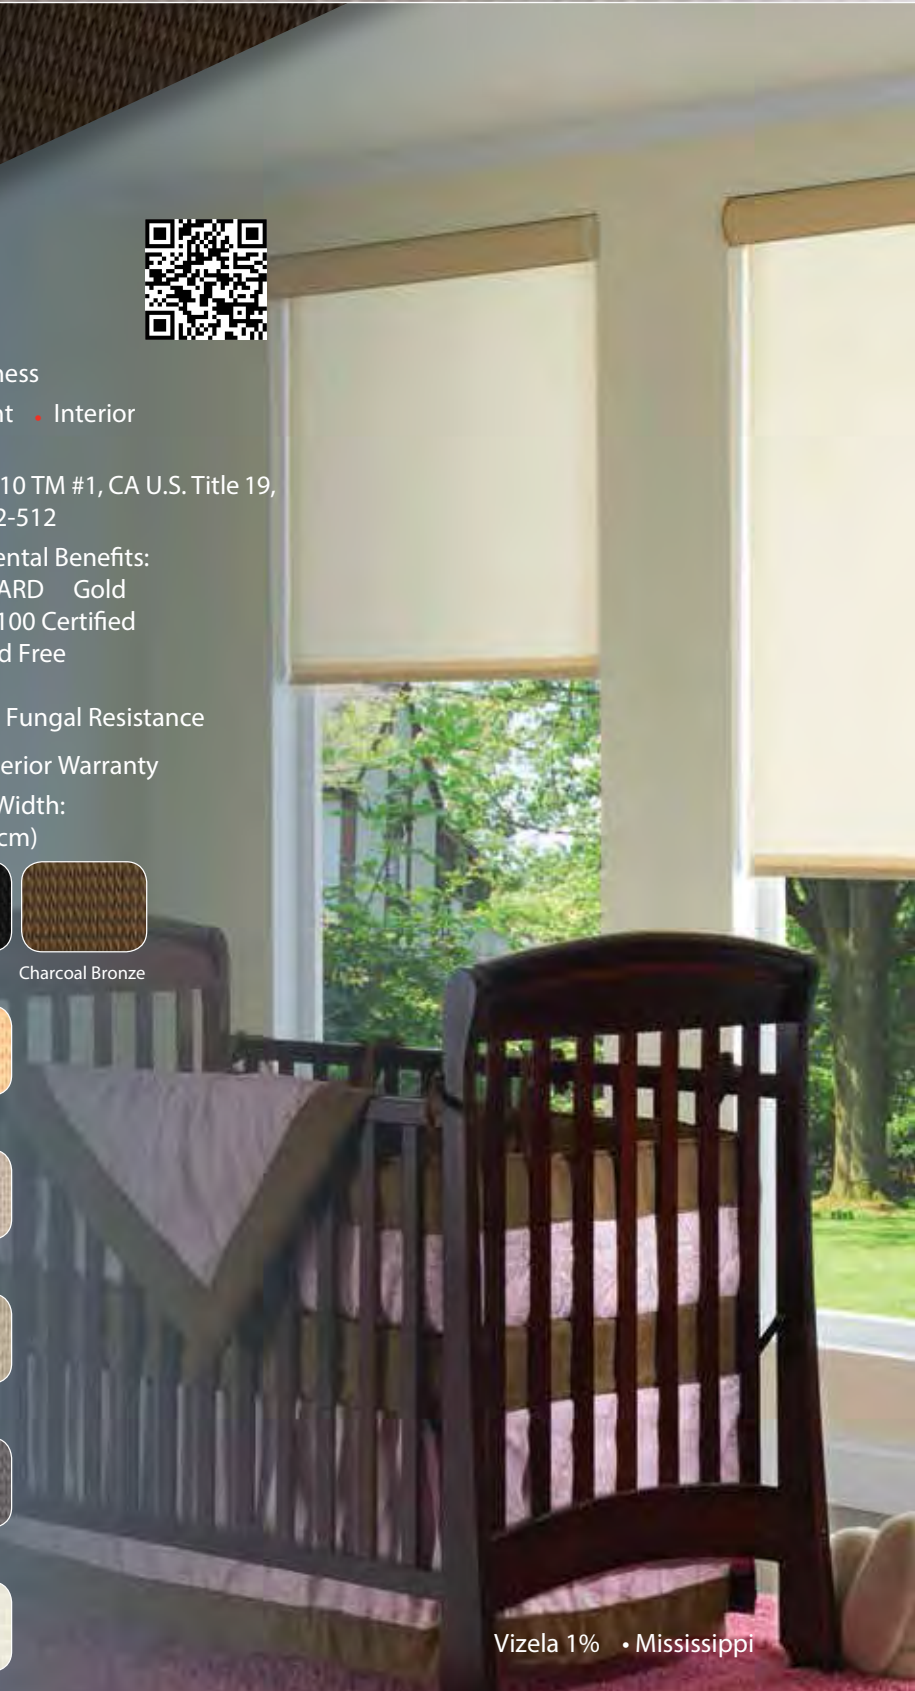

Vizela 1% • Mississippi

Specifications

Product Type:	Interior / Semi-Translucent	Width:	94.5" (240cm)
Composition:	100% Fiberglass / EVA Coating PVC Free	Weight:	8.7 oz / yd ² (295 g / m ²)
Standard Packaging:	Rolls of 30 ly (27 lm)	Thickness:	0.013" (0.35 mm)

Fenestration Properties*:

Openness Factor: 1%

UV Blockage: 99%

Color #	Color Name	Ts	Rs	As	Tv	SC SHGC/G Value		
						¼" CL	CL-S	DG
06.00	Blanc	32	61	7	33	0.46	0.40	0.38
06.08	Chartreux	20	39	41	17	0.59	0.51	0.44
06.09	Loutre	10	22	68	8	0.69	0.60	0.50
06.18	Mississippi	31	55	14	30	0.49	0.43	0.40
06.23	Sahel	30	55	15	30	0.49	0.43	0.40

*The fenestration property tests were conducted in accordance with EN 14501:2005, ASTM 891, ASTM E903-96: Shading Coefficient (SC), Solar Heat Gain Coefficient (SHGC), Solar Transmittance (Ts), Solar Reflectance (Rs), Solar Absorptance (As), Visible Light Transmittance (Tv); ¼ (6mm) Clear Glass (CL); 4mm Clear Glass, Single Glazing (CL-S); Double Glazing 4mm/16mm/4mm with low E-coating in position 3, space filled with Argon (DG); SC calculation: SHGC CL-S / 0.87. The above data is indicative. For up-to-date test results, performance specifications, and larger samples, contact the Mermet Marketing Department at www.mermetusa.com.

Fabrication Methods*:

Cutting: cold, ultrasonic or crush
Welding: radio frequency, high frequency, impulse, hot air, hot wedge

Fire Classifications:

NFPA 701-10 TM#1, California U.S. Title 19

Environmental Benefits:

RoHS – Lead Free, PVC Free

Fungal Resistance:

ASTM G21

*May require the use of welding tape. Please contact Mermet for more information about our welding tape product line. We recommend testing all cutting and welding methods prior to use to confirm they meet your individual fabrications specifications.

Care and Cleaning:

Remove any dust with vacuum cleaner or compressed air. Do not scrub. Do not use solvents or any abrasive substance which might damage the coating of the fabric. Clean with a sponge or a soft brush dipped in soapy water using mild detergent. Rinse with clean water. Leave the blind down until completely dry. You can also very gently rub the fabric with a clean white pencil eraser to remove small stains.